




FRUIT 1 SINGLE FIXTURE (STANDARD GRADE)





BEAM DOWN (DIRECT)

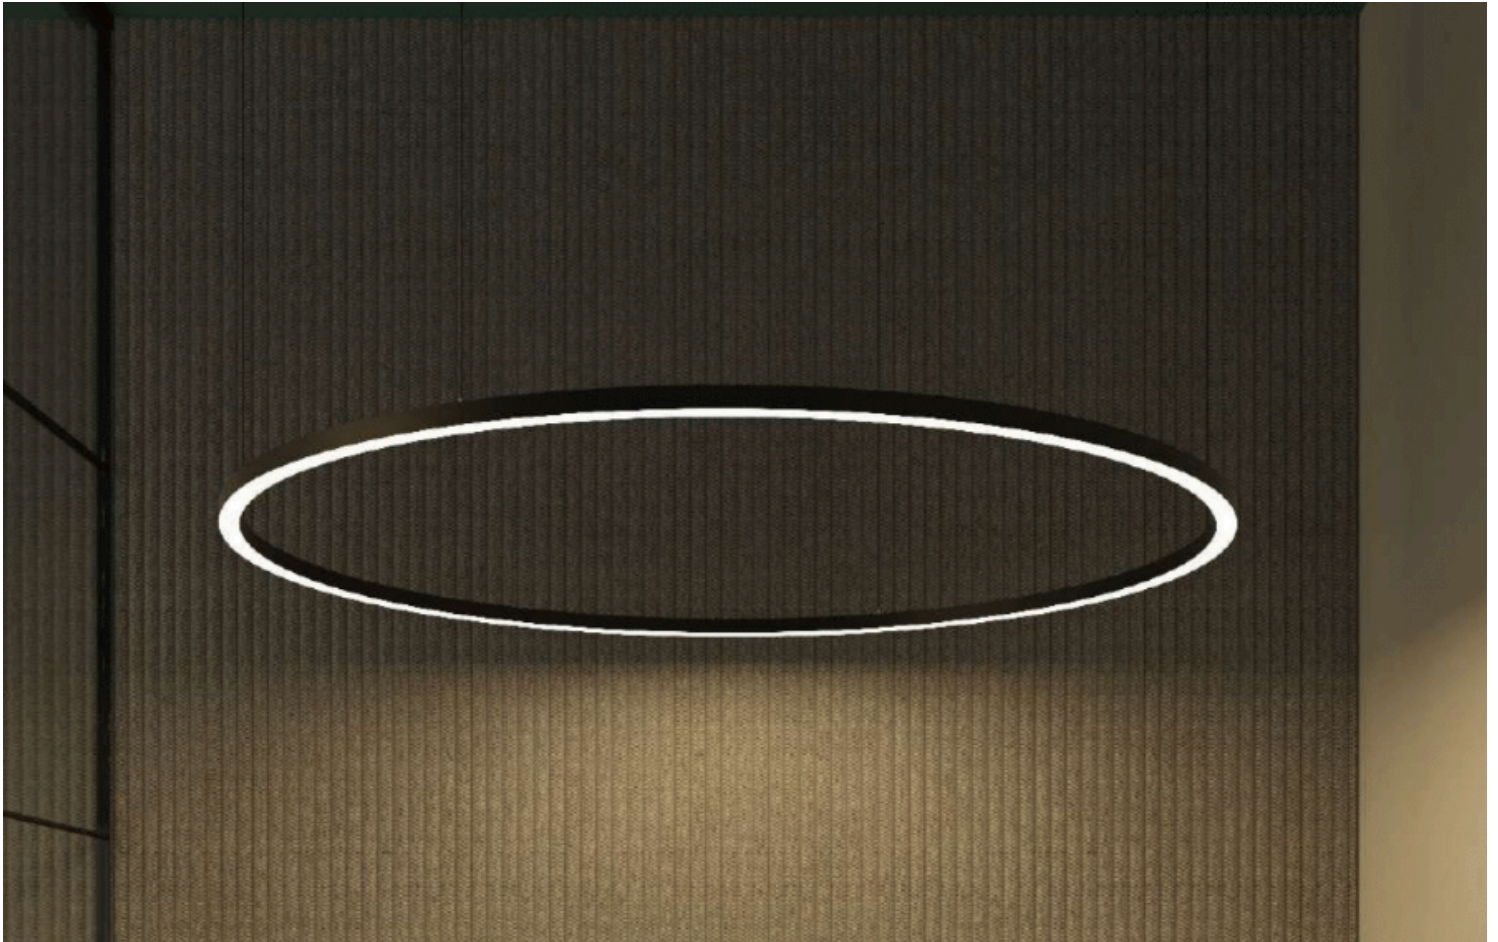

FRUIT1 SINGLE FIXTURE - STANDARD GRADE offers a unparalleled value cost proposition in 7 standard sizes ranging from 23.6 to 196.9 inch diameters. Direct lighting from 2700K to 4000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces

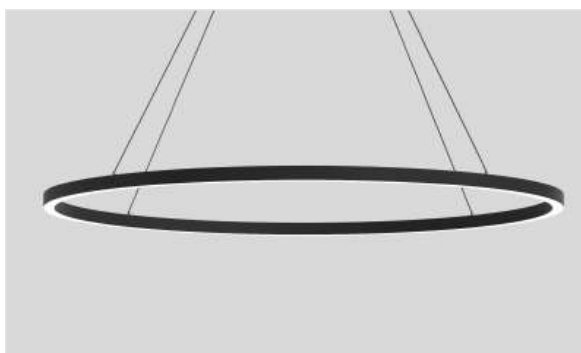

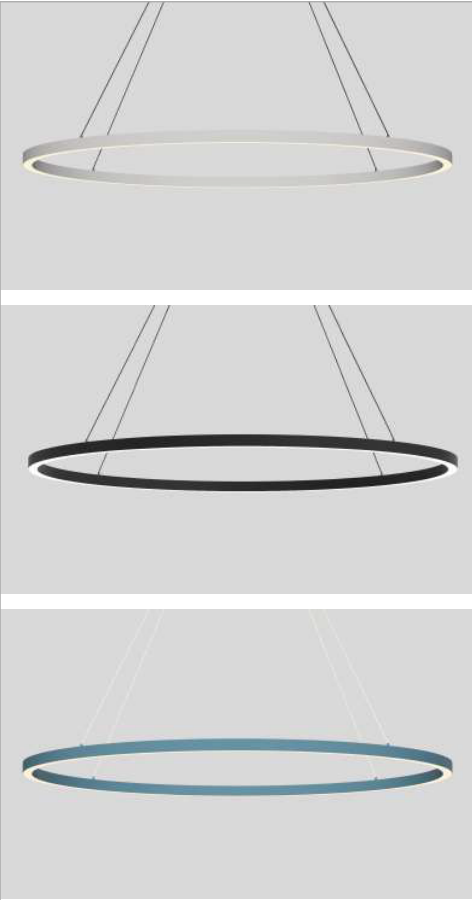PROJECT		MATERIAL: Aluminum body construction
SPEC TYPE		VOLTAGE: 110-277V
NOTES		LIGHTING: LED IP RATING: 44 APPLIANCE CLASS: I FINISH OPTIONS: Matt White, Matt Black, custom on request OPTICS: PMMA lenses, Anti-UV Operation LIGHTING EFFICIENCY: $\geq 85 \text{ lm/w}$ INSTALLATION TYPE: Suspended LIGHT DISTRIBUTION: DIRECT SIDE PROFILE HEIGHT: 1.5"



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

WWW.CERCHIOLIGHTING.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

HOW TO ORDER:

Example:

CODE: NS-LL0113-D24-40W-27K-0-10-SW-CS-RE

1

CIRCLE DIAMETER:

-D24	Ø: 24"	-D60	Ø: 60"	-D119	Ø: 119"
-D36	Ø: 36"	-D79	Ø: 79"	-D158	Ø: 158"
-D48	Ø: 48"	-D98	Ø: 98"	-D197	Ø: 197"

2

POWER AND LIGHT EMISSION:

CODE = WATTS | Ø DIRECT LUMENS CODE = WATTS | Ø DIRECT LUMENS

-40W	Ø: 24" / 3,400 lm	-200W	Ø: 119" / 17,000 lm
-50W	Ø: 36" / 4,250 lm	-300W	Ø: 158" / 25,000 lm
-80W	Ø: 48" / 6,800 lm	-400W	Ø: 197" / 34,000 lm
-100W	Ø: 60" / 8,500 lm		
-120W	Ø: 79" / 10,200 lm		
-160W	Ø: 98" / 13,600 lm		

*E.G : 40W = 40 total Watts

3

LED CRI:

-80 CRI 80 -90 CRI 90

4

SPECIFY CCT:

-27K 2700K
-30K 3000K
-35K 3500K
-40K 4000K

5

DIMMING OPTION:

-NON Non-Dimmable -0-10 0-10V

6



FIXTURE FINISH:

-SW Matt White -SB Matt Black -RAL Custom RAL on request*

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

WWW.CERCHIOLIGHTING.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

HOW TO ORDER:

Example:

CODE: NS-LL0113-D24-40W-27K-0-10-SW-CS-RE

7

CANOPY OPTIONS:

-CS Cable straight -CSS Central standard



8

ADDITIONAL FEATURES:


-RE Remote Emergency
-OS Occupancy Sensor
-DS Daylight Sensor / Light Harvesting

* E.G. : RE = Remote Emergency

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.CERCHIOLIGHTING.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

Updated 07/17/2026