




PROJECT

SPEC TYPE

NOTES

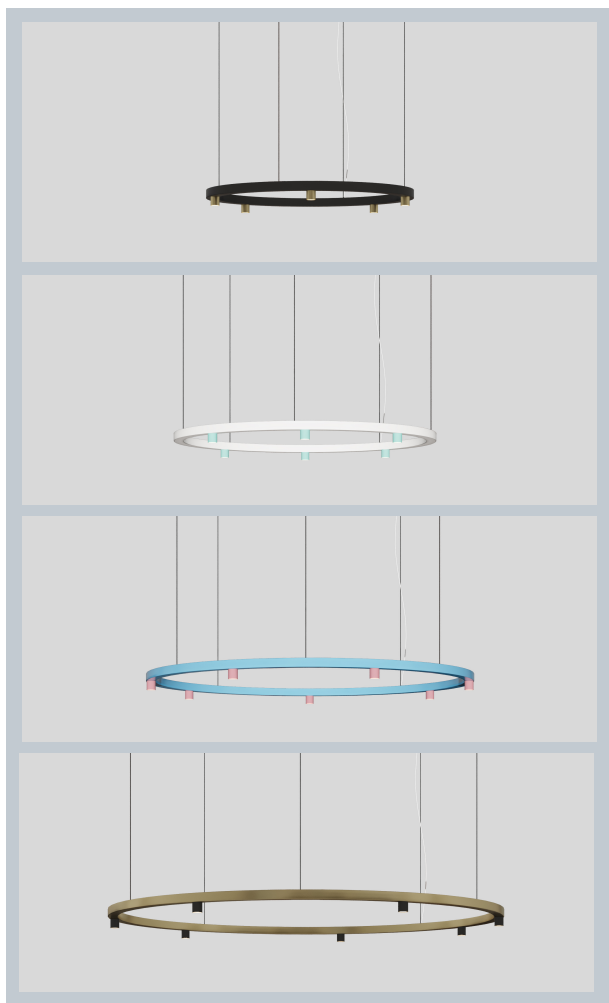

LED



IP20



GENERAL INFORMATION:

HIHOPE is a circle pendant with spots. You can choose between 4 different sizes, 3 standard finish options for ring (White, Black, and Gold) and 2 for spot (White, Black). RAL colors on request. HIHOPE offers you both dimmable and non-dimmable options.

FINISHING (RING):

White, Black, Gold, RAL colors on request

FINISHING (SPOT):

White, Black, RAL colors on request

BODY:

Aluminum

VOLTAGE:

110-277



LIGHTING:

LED

LED

IP RATING:

20

IP20

APPLIANCE CLASS:

I



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

Example:
DR-19-41-30K-02-112-01-ND

DR-19-41-30K-02-112-01-ND

1 MODELS:

-41 (5 spots)

Ø = Diameter

DIMENSIONS:

A) Diameter - Ø: 31.49" (80 cm)

LIGHT SOURCE:

LED / 600 Lm / 350 mA / 6,4 W / 34° (per spot)

-42 (6 spots)

Ø = Diameter

DIMENSIONS:

A) Diameter - Ø: 7.24" (120 cm)

LIGHT SOURCE:

LED / 600 Lm / 350 mA / 6,4 W / 34° (per spot)

-43 (7 spots)

Ø = Diameter

DIMENSIONS:

A) Diameter - Ø: 59.05" (150 cm)

LIGHT SOURCE:

LED / 600 Lm / 350 mA / 6,4 W / 34° (per spot)

-44 (7 spots)


Ø = Diameter

DIMENSIONS:

A) Diameter - Ø: 70.86" (180 cm)

LIGHT SOURCE:

LED / 600 Lm / 350 mA / 6,4 W / 34° (per spot)

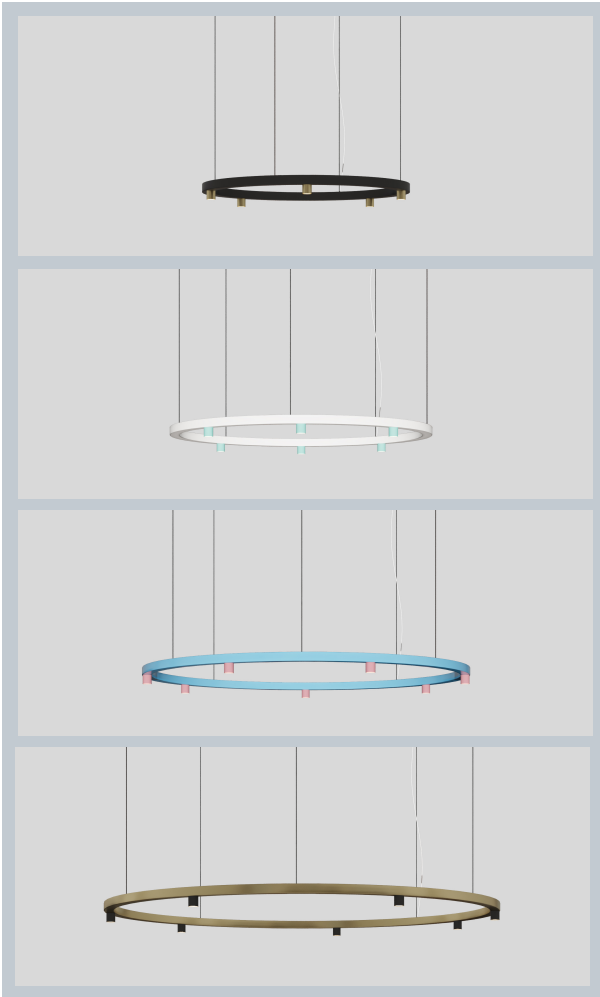

LED



IP20



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com


www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

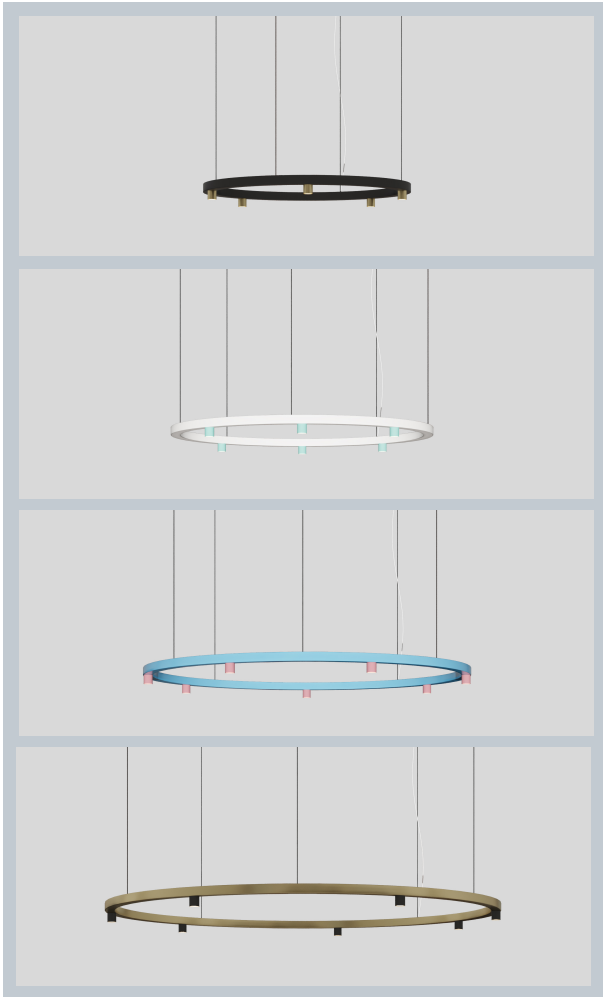

LED



IP20



HOW TO ORDER:

CODE

Example:
DR-19-41-30K-02-112-01-ND

DR-19-41-30K-02
-112-01-ND

2 CCT: (only for LED version)

-27K 2700K

-30K 3000K

3 SPOT FINISH OPTIONS:

-02 Black



-03 White



-RAL on request



4 RING FINISH OPTIONS:

-02 Black



-03 White



-112 Gold



-RAL on request



5 CABLE LENGHT:

-01 1,5 meters

-02 2,5 meters

-03 5 meters

-CUS Custom in request

6 DIMMING OPTIONS:

-ND Non dimmable

-0-10 Dimmable 0-10 V