CerchioLighting
cerchio = circle

CAPO 2 CHANDELIER
(STANDARD GRADE)


BEAM IN & OUT



CerchioLighting
cerchio = circle

CODE: NS-LL0213A

PROJECT
SPEC TYPE
NOTES

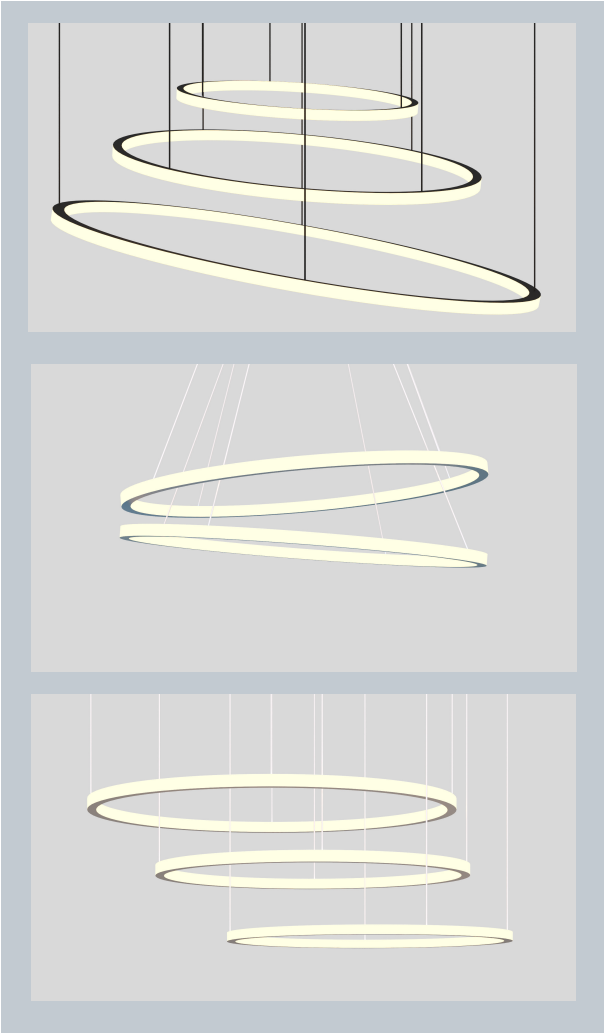









GENERAL INFORMATION:

CAPO 2 CHANDELIER- STANDARD GRADE offers a unparalleled value cost proposition in 5 standard sizes ranging from 12 to 48 inch diameters. Direct and indirect lighting from 2700K to 4000K .
Offering two standard canopy and mounting options, standard chandelier configurations as well as customizable.
Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≧ 70 lm/w

IP RATING:

44



APPLIANCE CLASS:

I



Contact Us:
sales@gordonbullard.com
www.cerchiolighting.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


©Bullard & Company 2024 All Rights Reserved

Updated 01/18/2024

CerchioLighting
cerchio = circle

CODE: NS-LL0213A

PROJECT
SPEC TYPE
NOTES

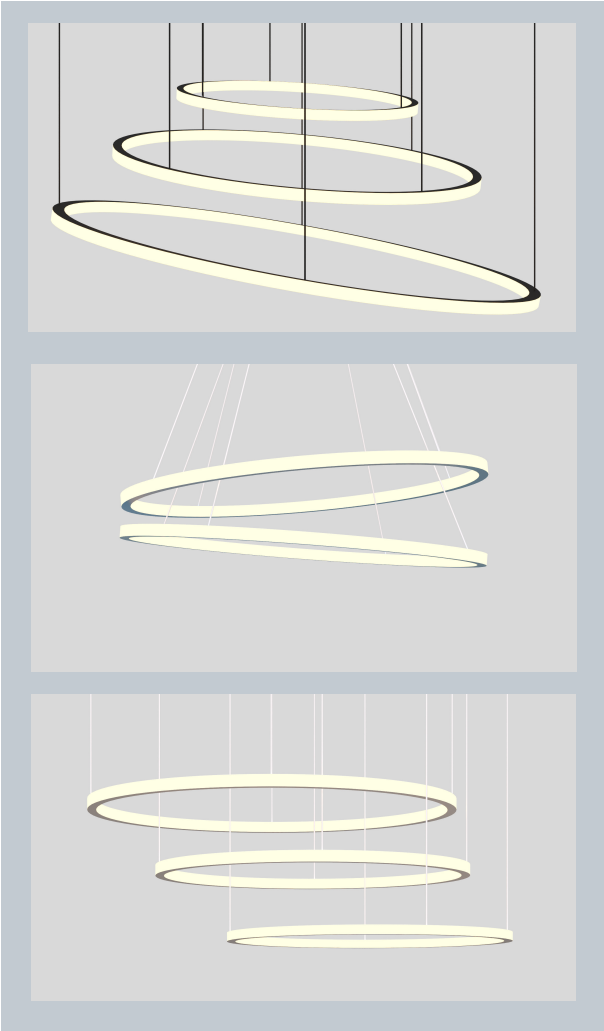

HOW TO ORDER:

CODE

Example:
NS-NS-LL0213A-DI-S-D24-1-3-60W-80-27K-DIM-SW-CS-C03

NS-LL0213A

1 LIGHT DISTRIBUTION:

-DI

-DI	DIRECT/INDIRECT

2 INSTALLATION TYPE:

-S

-S	Suspended

3 CIRCLE DIAMETER:

-D12	12"	**-D36**	36"
-D16	16"	**-D48**	48"
-D24	24"		

4 SIDE PROFILE HEIGHT:

-1-3

-1-3	1.3"

5 POWER AND LIGHT EMISSION:

CODE = TOTAL WATTS	Ø	LUMENS | WATTS
-32W	12"	2,240 lm/32W
-45W	16"	3,150 lm/45W
-60W	24"	4,200 lm/60W
-100W	36"	7,000 lm/100W
-135W	48"	9,450 lm/135W

*E.G : 60W = 60 total Watts

6 LED CRI:

-80	CRI 80
-90	CRI 90

7 SPECIFY CCT:

-27K	2700K	**-35K**	3500K
-30K	3000K	**-40K**	4000K

LED IP44

Contact Us:
sales@gordonbullard.com
www.cerchiolighting.com
1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


©Bullard & Company 2024 All Rights Reserved

Updated 01/18/2024

CerchioLighting
cerchio = circle

CODE: NS-LL0213A

PROJECT
SPEC TYPE
NOTES

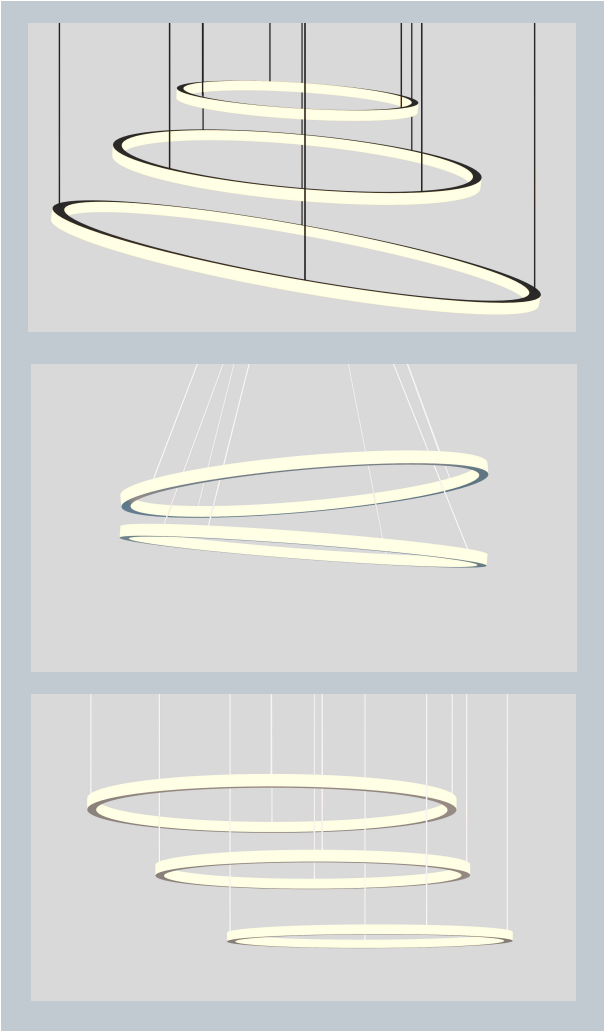









HOW TO ORDER: CODE

8 DIMMING OPTION:

-STD	Non-Dimmable
-DIM	1-10V


9 FIXTURE FINISH:

-SW	Matt White
-SB	Matt Black
-RAL	Custom RAL on request*

* E.G. : RAL = #3020

10 CANOPY OPTIONS:


CS
cable
straight


CSS
central
standard

11 ADDITIONAL FEATURES:

-RE	Remote Emergency
-OS	Occupancy Sensor
-DS	Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency

Contact Us:
sales@gordonbullard.com
www.cerchiolighting.com
1 877-964-4646


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©Bullard & Company 2024 All Rights Reserved


Updated 01/17/2024

16 CHANDELIER CONFIGURATIONS:


CAPO circles may be ordered as separate circle pendants and/or in cluster configurations of two, three or five fixtures of various sizes, as well as custom clusters. (Consult factory for custom designs.)




C01.




C02.




C03.




C04.




C05.



C06.



C07.



C08.



C09.



C10.



C11.



C12.

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©Bullard & Company 2024 All Rights Reserved