



PROJECT

SPEC TYPE

NOTES

GENERAL INFORMATION:

The CAPO 2 SPECIFICATION GRADE - Direct and Indirect Beam - With dual control and circuit options offers the ultimate in complete customization while still maintaining a superior value proposition in the marketplace. Every attribute from the canopy color, suspension hardware, electrical cable colors, housing finishes, LED optics, and lighting controls offer complete customization in both standard customization packages as well as complete customization of any size and any color.

OPTICS:

Machined formed and welded satin PMMA diffuser integrated into optimized light chamber design for dot-less uniform lighting.
High transmissivity PMMA (>90%) to maximize light output. Available in 2700K, 3000K, 3500K, 4000K, RGB and RGBW as well as custom request color temperatures with smooth, dot free illumination.

FINISHING:

A complete selection of powder coat finishes in addition to custom powder coat RAL, Faux-Wood finishes as well as one the worlds most complete selection of Galvanic Metal Finishes from Anthracite to 24 Karat Gold Finishes.

HOUSING/BODY:

Patented aluminum extruded and welded 6061-T6 aluminum Dual Ring Design allowing for no visible fasteners from human eyes when installed.
This design allows for sleek and customizable side wall widths with multiple variations from 2.5" to 6" widths with unlimited custom widths.
This patented construction system allows flexible diameter sizes and flexible side wall widths while still maintaining separate light chambers allowing for specified dual illumination packages, dual control packages, as well as dual circuit packages.

VOLTAGE:

110-277V



LIGHTING:


LED



IP RATING:

20

IP20

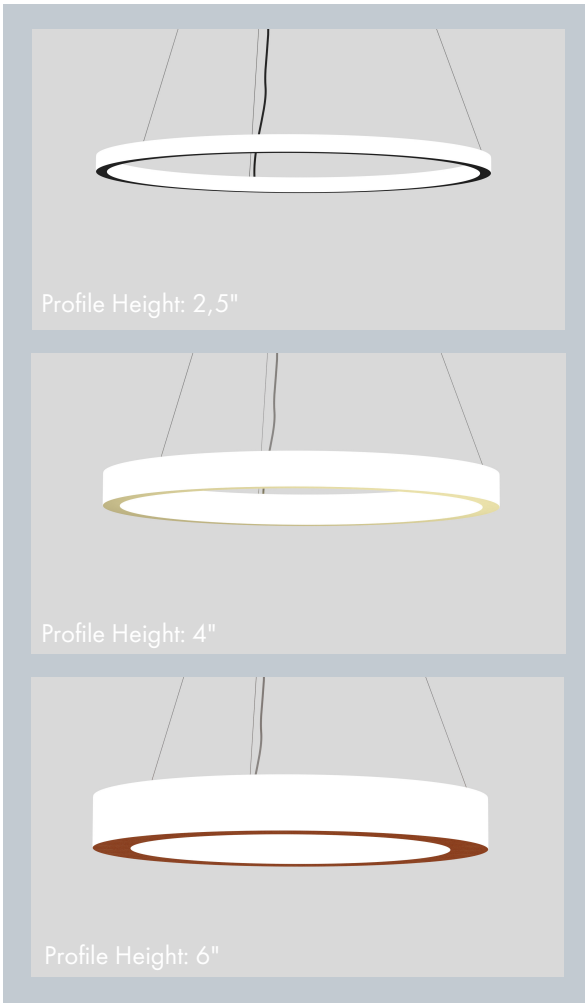

WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

Example:

P78-DI-D24-H3-W4-SS-80CR-27KD-30KID-ND-DE24-IW-BW-TS-RE

P78

1 LIGHT DISTRIBUTION:

-DI

-DI DIRECT/INDIRECT



2 CIRCLE DIAMETER:

-D24	24"	-D56	56"	-D84	84"
-D36	36"	-D60	60"	-D96	96"
-D42	42"	-D72	72"	-D120	120"
-D48	48"	-D78	78"		

-CDR*

Custom dimensions on request

3 SIDE PROFILE HEIGHT:

-H2-5	2.5"	-H5	5"
-H3	3"	-H6	6"
-H3-5	3.5"		
-H4	4"		

-CS*

Custom dimensions on request

4 WIDTH OF PROFILE:

-W2-5	2.5"	-W5	5"
-W3	3"	-W6	6"
-W3-5	3.5"		
-W4	4"		

-CS*

Custom dimensions on request

5 INSTALLATION AND CANOPY TYPE:



-SS
separate
standard

-SRD
separate
remote
driver

-CSS
central
standard

-CSR
central
remote driver

-NSR
nexus central
remote driver



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©Bullard & Company 2024 All Rights Reserved

Updated 01/17/2024

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

6 LED CRI:

-80CR CRI 80
-90CR CRI 90

7 SPECIFY CCT (DIRECT):

-27KD 2700K -35KD 3500K
-30KD 3000K -40KD 4000K
-KD-RGB RGB -50KD 5000K

8 SPECIFY CCT (INDIRECT):

-27KID 2700K -35KID 3500K
-30KID 3000K -40KID 4000K
-KID-RGB RGB -50KID 5000K
-NR Not-required

9 DIMMING OPTION:

-ND Non-Dimmable
-0-10 0-10V
-SDC separate dual controls
-CS* custom dimming on request

10 DIRECT LIGHT EMISSION:

CODE | DIAMETER | LUMENS | WATTS:

-DE24	24"	2,166 lm	26W
-DE36	36"	3,250 lm	39W
-DE42	42"	3,735 lm	45W
-DE48	48"	4,333 lm	52W
-DE56	56"	4,980lm	60W
-DE60	60"	5,416 lm	65W
-DE72	72"	6,500 lm	78W
-DE78	78"	6,889 lm	83W
-DE84	84"	7,470 lm	90W
-DE96	96"	8,666 lm	104W
-DE120	120"	10,624 lm	128W
-CS*		custom lumen packages on request	



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT

SPECTYPE

NOTES

HOW TO ORDER:

CODE

11 INDIRECT LIGHT EMISSION:

CODE | DIAMETER | LUMENS | WATTS:

-IDE24	24"	2,166 lm	26W
-IDE36	36"	3,250 lm	39W
-IDE42	42"	3,735 lm	45W
-IDE48	48"	4,333 lm	52W
-IDE56	56"	4,980 lm	60W
-IDE60	60"	5,416 lm	65W
-IDE72	72"	6,500 lm	78W
-IDE78	78"	6,889 lm	83W
-IDE84	84"	7,470 lm	90W
-IDE96	96"	8,666 lm	104W
-IDE120	120"	10,624 lm	128W
-NN	none		
-CS*	custom lumen packages on request		

12 FIXTURE FINISH:

POWDER COAT FINISHES

-WH	White Powder Coated
-BK	Black Powder Coated
-BR	Bronze Powder Coated
-CRM	Chrome Powder Coated
-CS*	Custom RAL on request

* E.G. : CS = RAL #3020

FAUX-WOOD PAINTED FINISHES

-W	Light wood
-BW	Brown wood
-DR	Dark wood

GALVANIC METAL FINISHES

-AL	Aluminum	-SC	Satin Copper
-AT	Anthracite	-CT	Corten
-NI	Nickel	-BSG	Brushed Satin Gold
-NS	Nickel Satin	-GL	Gold Leaf
-SL	Silver Leaf	-G24	Gold 24 Karat
-CL	Copper Leaf	-BL	Black
-OCL	Oxidated Copper Leaf	-BZ	Bronze



LED



IP20



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

13 CANOPY FINISH:

POWDER COAT FINISHES

-WH	White Powder Coat
-BK	Black Powder Coat
-BR	Bronze Powder Coat
-CRM	Chrome Powder Coat
-CS*	Custom RAL on request

* E.G. : CS = RAL #3020

FAUX-WOOD PAINTED FINISHES

-LW	Light wood
-BW	Brown wood
-DR	Dark wood

GALVANIC METAL FINISHES

-AL	Aluminum	-SC	Satin Copper
-AT	Anthracite	-CT	Corten
-NI	Nickel	-BSG	Brushed Satin Gold
-NS	Nickel Satin	-GL	Gold Leaf
-SL	Silver Leaf	-G24	Gold 24 Karat
-CL	Copper Leaf	-BL	Black
-OCL	Oxidated Copper Leaf	-BZ	Bronze

14 CORD FINISH:

-BL	Black
-WH	White
-TS	Transparent

15 OPTIONAL CONTROL FEATURES:

-RE	Remote Emergency
-OS	Occupancy Sensor
-DS	Daylight Sensor/Light Harvesting



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:


sales@gordonbullard.com

www.cerchiolighting.com


1 877-964-4646

CHANDELIER CONFIGURATIONS:


CAPO circles may be ordered as separate circle pendants and/or in cluster configurations of two, three or five fixtures of various sizes, as well as custom clusters. (Consult factory for custom designs.)




C01.




C02.




C03.



C04.



C05.



C06.



C07.



C08.




C09.



C10.



C11.



C12.